

POINTER® Nitinol Guidewire

Flexibility and stability, strength and malleability all in one wire
– available in two sizes: .018" and .020"

- Excellent visibility through highly radiopaque coil tip.
- Smooth transition from nitinol core to hydrophilic coated radiopaque tip provides excellent manoeuvrability.
- HYDROFEEL® hydrophilic coating on tip for less traumatic path finding/advancement.
- PTFE coated nitinol shaft for minimal friction during introduction and manipulation.
- Nitinol shaft construction provides 1:1 torque control and kink-resistance for negotiating through tortuous anatomy.

POINTER® Nitinol Guidewire • 4 cm flexible coil **Box of 5**


1804 18 210 .018" (0.46 mm) x 210 cm

1804 18 260 .018" (0.46 mm) x 260 cm

1804 18 300 .018" (0.46 mm) x 300 cm

1804 20 210 .020" (0.49 mm) x 210 cm

1804 20 300 .020" (0.49 mm) x 300 cm

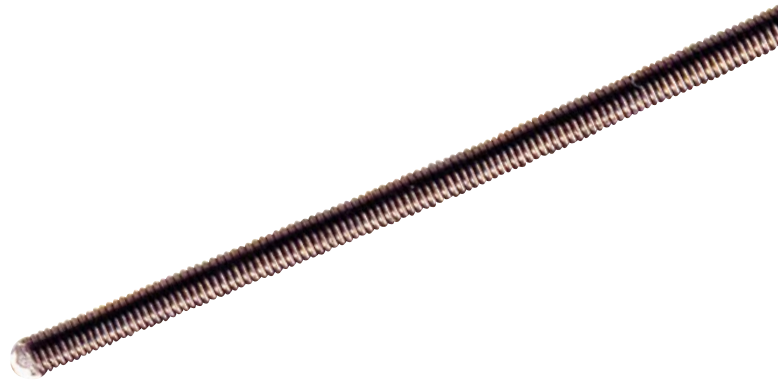

POINTER® Nitinol Guidewire • 6 cm flexible coil **Box of 5**

1806 20 210 .020" (0.49 mm) x 210 cm

1806 20 300 .020" (0.49 mm) x 300 cm

PLACER® Guidewire

PLACER® is a guidewire with an excellent back-up due to its stainless steel shaft. The guidewire is available in two sizes: .018" and .020"

- Excellent visibility through highly radiopaque coil tip.
- Smooth transition from PTFE coated stainless steel core to hydrophilic coated radiopaque tip provides excellent manoeuvrability.
- HYDROFEEL® hydrophilic coating on tip for less traumatic path finding/advancement.
- PTFE coated stainless steel shaft for minimal friction during introduction and manipulation.
- Stainless Steel shaft construction provides excellent back-up.

PLACER® Guidewire • 4 cm flexible coil **Box of 5**

1184 18 210 .018" (0.46 mm) x 210 cm

1184 18 300 .018" (0.46 mm) x 300 cm

1184 20 210 .020" (0.49 mm) x 210 cm

1184 20 300 .020" (0.49 mm) x 300 cm


PLACER® Guidewire • 6 cm flexible coil **Box of 5**

1186 18 210 .018" (0.46 mm) x 210 cm

1186 18 300 .018" (0.46 mm) x 300 cm

1186 20 210 .020" (0.49 mm) x 210 cm

1186 20 300 .020" (0.49 mm) x 300 cm

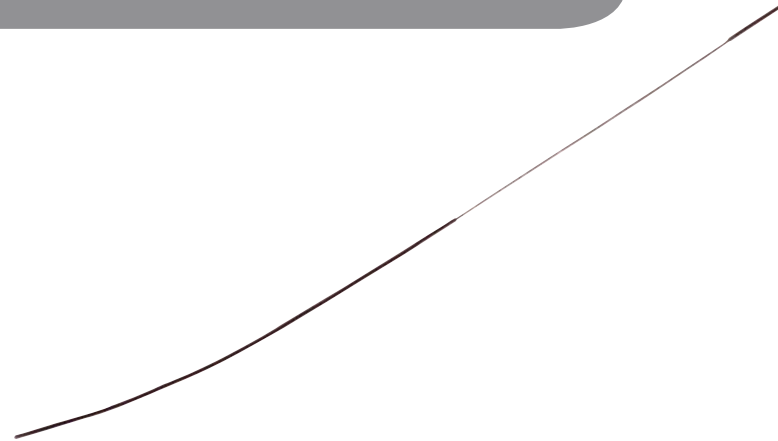

Lunderquist Stainless Steel Guidewires

The Lunderquist Guidewire is an extremely stiff guidewire used to provide extra support during non-vascular procedures. Flexible tip for access to delicate or difficult areas.

1051



1052



- Lunderquist guidewire for firm support.
- Available in a variety of lengths and tip configurations.

Lunderquist Stainless Steel Guidewire • Straight **Box of 10**

1051 28 082 .028" (0.71 mm) x 82 cm, 7.5 cm flexible coil

1051 35 082 .035" (0.89 mm) x 82 cm, 7.5 cm flexible coil

1051 35 120 .035" (0.89 mm) x 120 cm, 7.5 cm flexible coil

Lunderquist Stainless Steel Guidewire • 3 mm J Curve **Box of 10**

1052 28 082 .028" (0.71 mm) x 82 cm, 7.5 cm flexible coil

1052 35 082 .035" (0.89 mm) x 82 cm, 7.5 cm flexible coil

1052 35 120 .035" (0.89 mm) x 120 cm, 7.5 cm flexible coil

