


# SKATER® Nephrostomy Catheters

SKATER® catheter for nephrostomy using the Seldinger technique. The catheter is made of soft polyurethane for optimal kink resistance and perfect configuration memory.

- SKATER® Nephrostomy catheter with locking or non-locking pigtail, and with metal or flexible stiffening cannula.
- HYDROFEEL® coating at the distal tip for easy insertion.
- Large lumen and large oval drainage holes designed for maximal drainage capacity.
- Removable pigtail straightener.

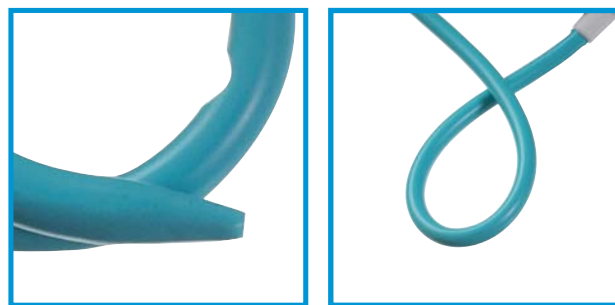

7556

Drainage

## SKATER® Nephrostomy Catheter • with locking pigtail Box of 5

- |                    |  |
|--------------------|--|
| <b>7556 06 025</b> | 6F x 25 cm, accepts guidewire .035" (0.89 mm), metal stiffening cannula                |
| <b>7556 06 035</b> | 6F x 35 cm, accepts guidewire .035" (0.89 mm), metal stiffening cannula                |
| <b>7556 07 025</b> | 7F x 25 cm, accepts guidewire .035" (0.89 mm), metal stiffening cannula                |
| <b>7556 07 035</b> | 7F x 35 cm, accepts guidewire .035" (0.89 mm), metal stiffening cannula                |
| <b>7556 08 025</b> | 8F x 25 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae  |
| <b>7556 08 035</b> | 8F x 35 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae  |
| <b>7556 10 025</b> | 10F x 25 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae |
| <b>7556 10 035</b> | 10F x 35 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae |
| <b>7556 12 025</b> | 12F x 25 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae |
| <b>7556 12 035</b> | 12F x 35 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae |
| <b>7556 14 025</b> | 14F x 25 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae |
| <b>7556 14 035</b> | 14F x 35 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae |

## SKATER® Nephrostomy Catheter • with non-locking pigtail Box of 5

- |                    |  |
|--------------------|--|
| <b>7555 06 025</b> | 6F x 25 cm, accepts guidewire .035" (0.89 mm), metal stiffening cannula                |
| <b>7555 06 035</b> | 6F x 35 cm, accepts guidewire .035" (0.89 mm), metal stiffening cannula                |
| <b>7555 07 025</b> | 7F x 25 cm, accepts guidewire .035" (0.89 mm), metal stiffening cannula                |
| <b>7555 07 035</b> | 7F x 35 cm, accepts guidewire .035" (0.89 mm), metal stiffening cannula                |
| <b>7555 08 025</b> | 8F x 25 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae  |
| <b>7555 08 035</b> | 8F x 35 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae  |
| <b>7555 10 025</b> | 10F x 25 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae |
| <b>7555 10 035</b> | 10F x 35 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae |
| <b>7555 12 025</b> | 12F x 25 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae |
| <b>7555 12 035</b> | 12F x 35 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae |
| <b>7555 14 025</b> | 14F x 25 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae |
| <b>7555 14 035</b> | 14F x 35 cm, accepts guidewire .038" (0.97 mm), metal and flexible stiffening cannulae |