


SKATER® Single Step Drainage Sets



SKATER® catheter with Choice Lock is suitable for a variety of applications. Single step procedures are simple and safe with this unique catheter. The catheter is coated with HYDROFEEL® hydrophilic coating for minimal friction during insertion.

- Choice Lock needle for single handed release of stylet.
- Soft polyurethane for optimal kink resistance and perfect configuration memory and HYDROFEEL® coating for easy insertion.
- Large oval drainage holes and large lumen designed for maximal drainage capacity.
- Minimal tissue trauma and ulcerations reduce patient discomfort.
- With locking or non-locking pigtail.

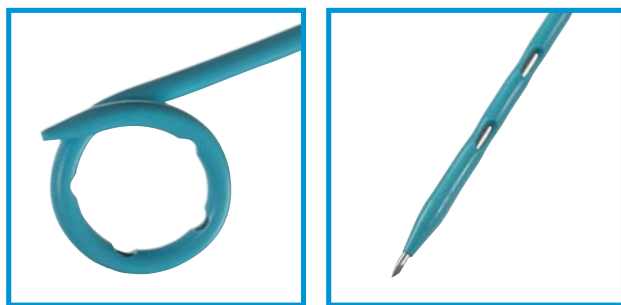

7565

SKATER® Single Step Drainage Set with locking pigtail

Box of 5

7565 06 020	6F x 20 cm, 19G (1.0 mm) trocar accepts guidewire .035" (0.89 mm)
7565 06 025	6F x 25 cm, 19G (1.0 mm) trocar accepts guidewire .035" (0.89 mm)
7565 07 020	7F x 20 cm, 18G (1.2 mm) trocar accepts guidewire .035" (0.89 mm)
7565 07 025	7F x 25 cm, 18G (1.2 mm) trocar accepts guidewire .035" (0.89 mm)
7565 08 020	8F x 20 cm, 17G (1.4 mm) trocar accepts guidewire .038" (0.97 mm)
7565 08 025	8F x 25 cm, 17G (1.4 mm) trocar accepts guidewire .038" (0.97 mm)
7565 10 020	10F x 20 cm, 17G (1.4 mm) trocar accepts guidewire .038" (0.97 mm)
7565 10 025	10F x 25 cm, 17G (1.4 mm) trocar accepts guidewire .038" (0.97 mm)
7565 12 020	12F x 20 cm, 17G (1.4 mm) trocar accepts guidewire .038" (0.97 mm)
7565 12 025	12F x 25 cm, 17G (1.4 mm) trocar accepts guidewire .038" (0.97 mm)
7565 14 020	14F x 20 cm, 14G (2.0 mm) trocar accepts guidewire .038" (0.97 mm)
7565 14 025	14F x 25 cm, 14G (2.0 mm) trocar accepts guidewire .038" (0.97 mm)
7565 16 025	16F x 25 cm, 14G (2.0 mm) trocar recommended guidewire .038" (0.97 mm)

SKATER® Single Step Drainage Set with non-locking pigtail

Box of 5

7560 06 020	6F x 20 cm, 19G (1.0 mm) trocar, accepts guidewire .035" (0.89 mm)
7560 06025	6F x 25 cm, 19G (1.0 mm) trocar, accepts guidewire .035" (0.89 mm)
7560 07 020	7F x 20 cm, 18G (1.2 mm) trocar, accepts guidewire .035" (0.89 mm)
7560 07 025	7F x 25 cm, 18G (1.2 mm) trocar, accepts guidewire .035" (0.89 mm)
7560 08 020	8F x 20 cm, 17G (1.4 mm) trocar, accepts guidewire .038" (0.97 mm)
7560 08 025	8F x 25 cm, 17G (1.4 mm) trocar, accepts guidewire .038" (0.97 mm)
7560 10 020	10F x 20 cm, 17G (1.4 mm) trocar, accepts guidewire .038" (0.97 mm)
7560 10 025	10F x 25 cm, 17G (1.4 mm) trocar, accepts guidewire .038" (0.97 mm)
7560 12 020	12F x 20 cm, 14G (2.0 mm) trocar, accepts guidewire .038" (0.97 mm)
7560 12 025	12F x 25 cm, 14G (2.0 mm) trocar, accepts guidewire .038" (0.97 mm)
7560 14 020	14F x 20 cm, 14G (2.0 mm) trocar, accepts guidewire .038" (0.97 mm)
7560 14 025	14F x 25 cm, 14G (2.0 mm) trocar, accepts guidewire .038" (0.97 mm)
7560 16 025	16F x 25 cm, 14G (2.0 mm) trocar, recommended guidewire .038" (0.97 mm)