


# WORKER® Guidewires

Worker® guidewires are manufactured with a pre-coating technique offering a safe and flexible guidewire.

The PTFE coating used is the latest formula resulting in low friction. All guidewires are packed in a circular dispenser facilitating easy flushing of the guidewire.

- Low friction due to PTFE coating.
- Malleable tip.
- Colour coded guidewire straightener locks the wire in the dispenser and provides easy introduction in the puncture needle or catheter.

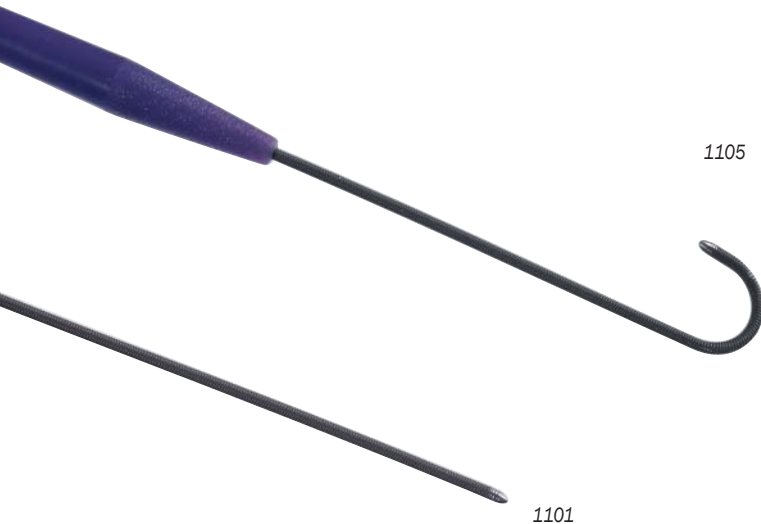

## Standard • Straight, with fixed core

Box of 10

**1101 35 150** .035" (0.89 mm) x 150 cm, 3.5 cm soft tip

**1101 38 150** .038" (0.97 mm) x 150 cm, 3.5 cm soft tip

## Standard • with J Curve, fixed core

Box of 10

**1105 35 150** .035" (0.89 mm) x 150 cm, 3 mm J 3.5 cm soft tip

**1105 38 150** .038" (0.97 mm) x 150 cm, 3 mm J 3.5 cm soft tip

## Amplatz • Straight

Box of 10

**1140 35 090** .035" (0.89 mm) x 90 cm, 7.5 cm soft tip

**1140 35 150** .035" (0.89 mm) x 150 cm, 7.5 cm soft tip

**1140 35 180** .035" (0.89 mm) x 180 cm, 7.5 cm soft tip

**1141 35 080** .035" (0.89 mm) x 80 cm, 3.5 cm soft tip

**1141 35 150** .035" (0.89 mm) x 150 cm, 3.5 cm soft tip

**1141 35 180** .035" (0.89 mm) x 180 cm, 3.5 cm soft tip

## Amplatz • 3 mm J Curve

Box of 10

**1142 35 090** .035" (0.89 mm) x 90 cm, 3 mm J 7.5 cm soft tip

**1142 35 150** .035" (0.89 mm) x 150 cm, 3 mm J 7.5 cm soft tip

